

1. Cluster fascia panel

Body (Interior and Exterior)



Replacement


CAUTION

- Put on gloves to protect your hands.

NOTICE

- When prying with a flat-tip screwdriver, wrap it with protective tape, and apply protective tape around the related parts, to prevent damage.
- Use a plastic panel removal tool to remove interior trim pieces to protect from marring the surface.
- Take care not to bend or scratch the trim and panels.

1. Lower the steering wheel.
2. Using a screwdriver or remover, remove the cluster fascia panel (A).

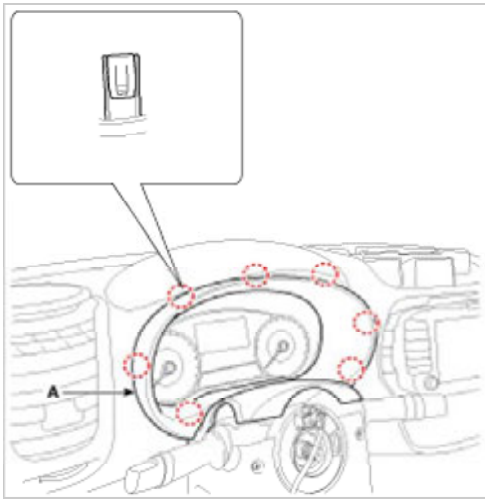

3. Install in the reverse order of removal.

i Information

- Replace any damaged clips.

Body (Interior and Exterior)



Component Location

